


**12 YEARS**  
Guarantee on product  
material and workmanship

**25 YEARS**  
Linear Power output  
warranty

**STC irradiance**  
STC irradiance 1000W/m<sup>2</sup>  
Cell Temperature 25 °C AM=1.5

**NOCT irradiance**  
NOCT irradiance 800W/m<sup>2</sup>  
Ambient Temperature 20 °C AM=1.5

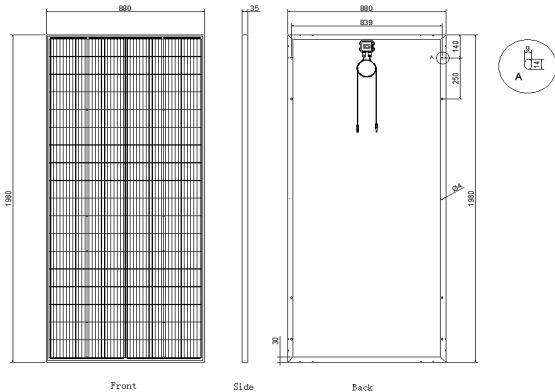

## MECHANICAL CHARACTERISTICS

Cell Type	210x105Mono
No. of Cells	72(4x18)
Dimensions	1980*880*35mm
Weight	18.3kg
Front Glass	3.2mm high transmission low iron,tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP65/IP67
Output cables	4mm <sup>2</sup> cable 90cm+mc4
MaxWind Load/Snow Load	2400Pa/5400Pa

## TEMPERATURE & MAXIMUM RATING

Maximum System Voltage(V)	1500
Maximum Series Fuse Rating(A)	20
Power Tolerance	0~ +3%
Pmax Temperature Coefficients(W/ °C)	-0.350%
Voc Temperature Coefficients(V/ °C)	-0.270%
Isc Temperature Coefficients(A/ °C)	+0.048%
NOCT Nominal Operating Cell Temperature( °C)	45±2
Operating and Storage Temperature( °C)	-40 ~ +85

## ELECTRICAL DATA(STC)

Model Type	FG350M-72	FG360M-72	FG370M-72
Peak Power(Pmax)	350W	360W	370W
Maximum Power Voltage(Vmp)	40.09	40.72	41.2
Maximum Power Current(Imp)	8.74	8.85	8.99
Open Circuit Voltage(Voc)	47.49	47.85	48.18
Short Circuit Current(Isc)	9.26	9.36	9.47
Module Efficiency(%)	20.08	20.66	21.24

\* STC: irradiance 1000 W/m<sup>2</sup>, AM 1.5G, and cell temperature of 25°C

## PACKING WAY

20FT	5Packages/300PCS
40HQ	11Packages/748PCS



## Future Green Technology Co., Ltd.

No.26 Longjing west road, Baiyun District, Guangzhou city, Guangdong Province, China.  
Email: info@futuregreenbattery.com Tel: +86-020-31230665